

# HKNE-10

## 19" L9D Console Drawer




### Specifications

Specifications	HKNE-10
Panel	FJ+V/VE500A 10500/0a&  ã @
Active Display Area (mm)	376.32 (H) x 301.056 (V)
Pixel Pitch (mm)	0.294(H) x 0.294(V)
Resolution	1280 x 1024
Color Pixel Arrangement	RGB Vertical Strip
Display Mode	Normally Black
Brightness (cd/m <sup>2</sup> )	350 (Center)
Contrast Ratio	1000:1
Support Color	16.7M colors (RGB 6-bit data+HiFRC data)
User Control	OSD Control (Auto Saving)
Input Signal	RGB Analog, H/V Separate
Plug-n-Play VESA	VESA DDC 2B
Power Consumption	20.55W
Viewing Angle	- 85~ 85(H)
	- 80~ 80(V)
Surface Treatment	Anti-Glare treatment
Approval	CE, FCC for the Product. UL, TUV, CE for Power Supply

### Features

- Modularized KVM switch design.
- Flip-open L9D panel supports resolution 1280x1024.
- 19" TFT-LCD with LED Backlight
- For managing computers with PS/2, USB, or Sun interface.
- For rack cabinet with depth from 20" (50cm) and up (with appropriate Rear bracket & extension kit).
- Standard 19" 1U rack drawer.
- Locking mechanism locks the drawer when pulled out, pushed in, or folded down.
- Full 105 key, low-profile, sturdy keyboard included.
- A universal C-36 connector for connection between console drawer and Integra KVM switch module.
- User-replaceable keyboard with various languages support
- User-replaceable touch pad for easy replacement
- Touch pad with simulated wheel control
- Supports Sun keyboard mapping and Mac keyboard mapping.
- Ultra sturdy, tilt-free, two-piece Rear Bracket and Extension design.

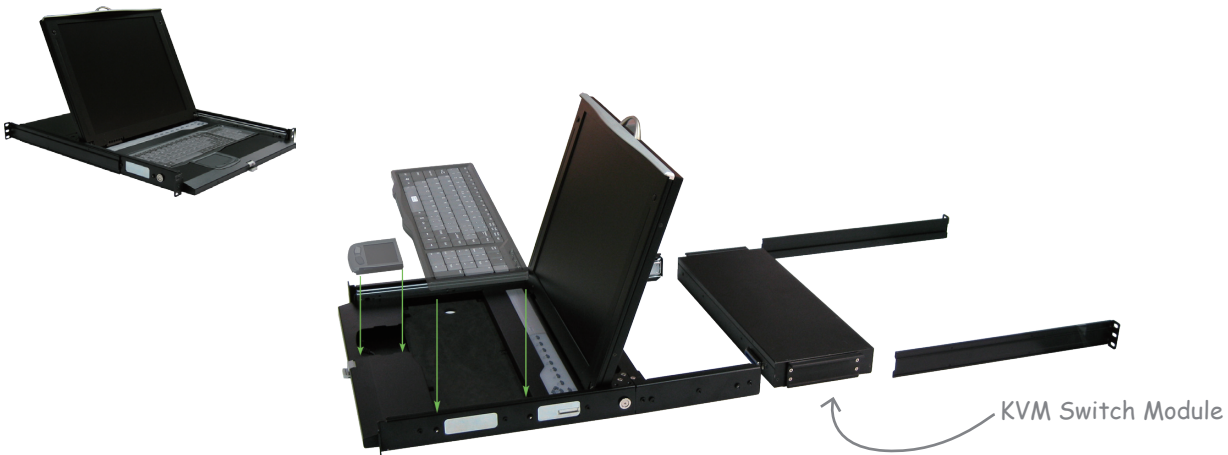

	HKNE-10 (19")
Keyboard Replaceable	Yes
Touch Pad Replaceable	Yes
Module Selection	Yes
H x W x D (mm)	44 x 440 x 655